

# PLANE EASY

POLYURETHANE FOAM EQUIPMENT


The ideal tool to flush finish any spray-applied polyurethane foam. Simple, lightweight and reliable. A basic, durable instrument to complement existing urethane spray equipment for all work or trades requiring flat, smooth finished surfaces. Can be used on open cell, closed cell, 1/2 pound, and 2 to 10+ pound foam. Available with an electric motor and nylon brush, or pneumatic motor with interchangeable wire brush or carbide blades cartridge, each tool is available in 16" or 24" models.



 **J. CALMAN INDUSTRIES, LLC**



Distributed By: Poly-Source Industries  
#1 – 19725 Telegraph Trail  
Langley, BC V1M 3E6  
Tel: 604-888-3505  
Fax: 604-888-3503

# FOAM PLANER

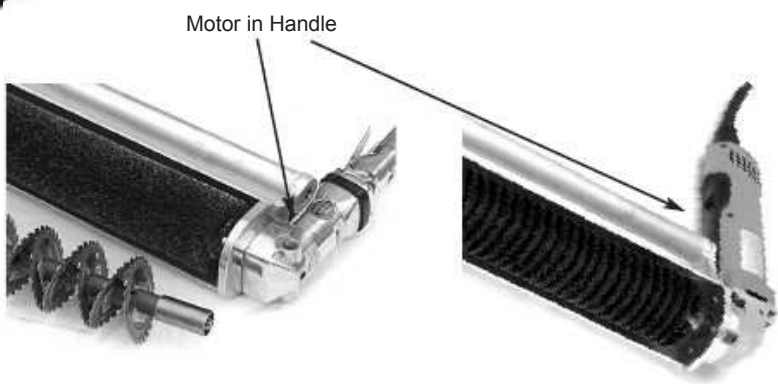

Assembled Weight: 16" - 13.20 lbs.  
24" - 17.55 lbs.

The tool designed to give you maximum usage, minimum down time, and top quality construction.

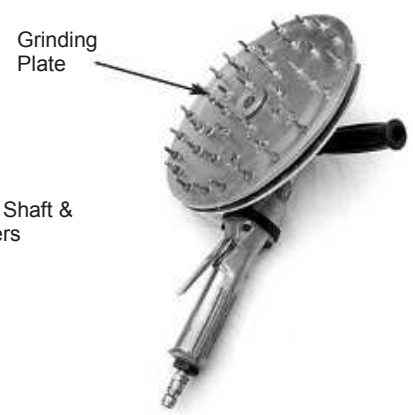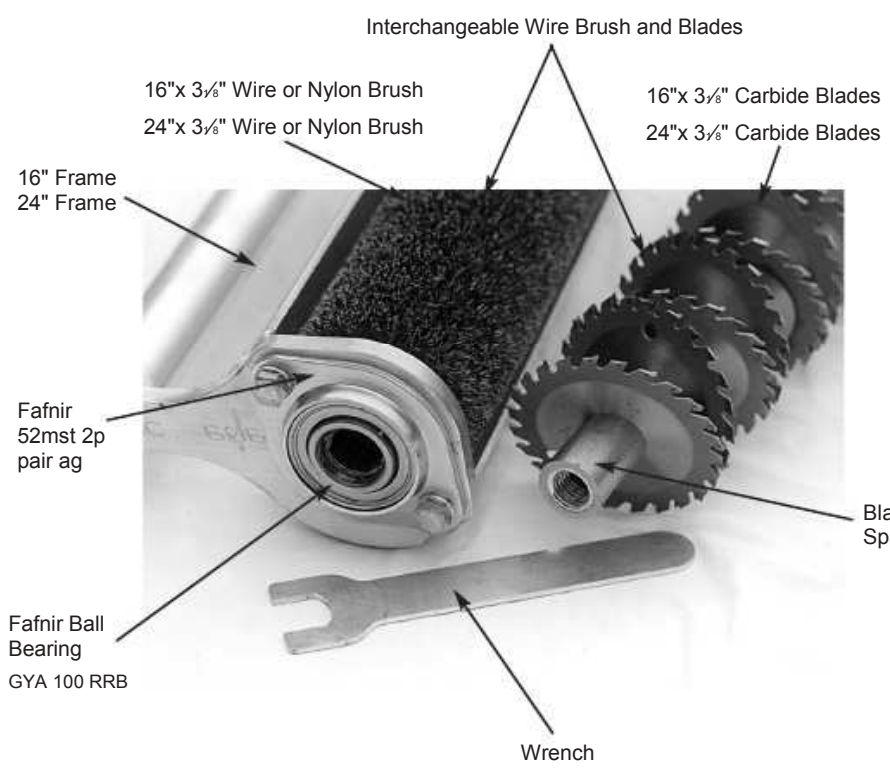

8.10 lbs.

## REQUIREMENTS

The air motor operates most efficiently when air pressure is maintained at 125 psi. An air compressor able to deliver 23.0 cfm is necessary. Incoming air should be DRY, clean, and filtered.  $\frac{1}{4}$ " line from compressor. Last 20' use  $\frac{1}{2}$ " airline.

Lubricate this tool at least once every 8 hours by pouring a small quantity of air motor oil through the air inlet.